

AC-ECO



Automatic Hematology Analyzer



- **2 counting mode: whole blood and prediluted**
- **Color LCD with mouse/keyboard operation**
- **External AC adapter avoids electronic noises, enhancing accuracy**
- **Up to 35000 sample results (including histograms) can be stored**
- **Multi-language software available on request**
- **Original factory's blood control and calibrator**



20 parameters
+3 histograms



3-Part
Differential WBC



Internal
Thermal Printer




High Accuracy
& Reliability



Up to 60 samples
per hour

AC-ECO

Automatic Hematology Analyzer

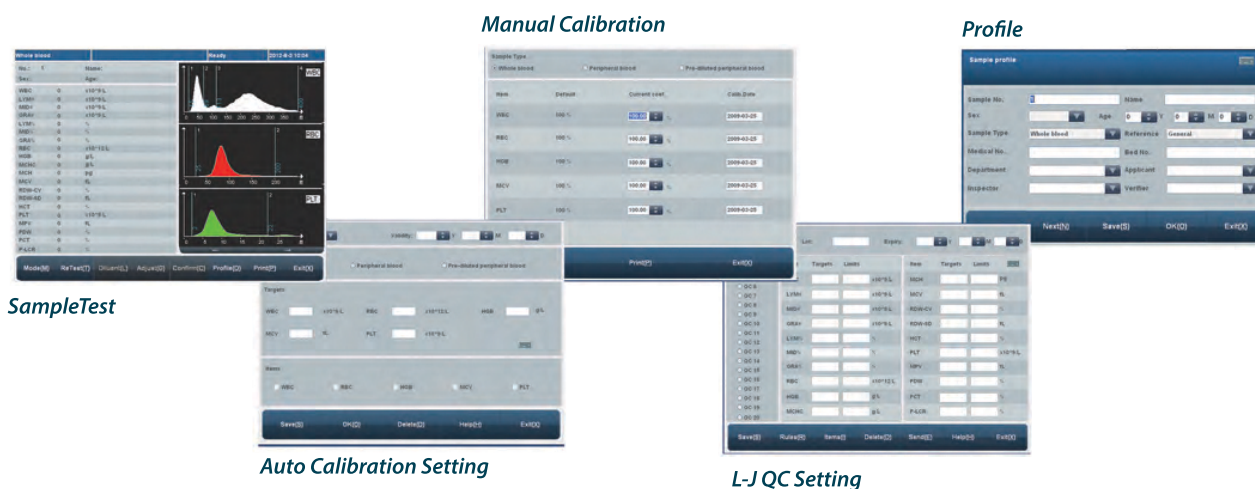

SPECIFICATIONS

Parameters	WBC, LYM#, MID#. GRA#. LYM%, MID%, GRA%, RBC. HGB. MCHC, MCH, MCV. RDW-CV, RDW-SD, HCT, PLT, MPV, PDW, PCT, P-LCR and Histograms for WBC, RBC and PLT
Principle	Electrical resistance for counting WBC, RBC and PLT Prediluted 20µL,
Sample Volume	Whole Blood : 9.8µL
Throughput	60 samples per hour
Display	8" T color LCD
Alarms	Error messages
Input/Output	RS-232, USB, LAN, keyboard and mouse interface
Printout	Built-in thermal printer, external printer optional
Operating Environment	Temperature : 15C~35°C; Humidity : 10%-90%
Power Requirement	AC 110V-220V, 50/60HZ
Dimension L x W x H (mm)	436 x 363 x 367
Weight	18Kg



Service Helpline
18008894232

ACER BIOMEDICALS LLP

Office: Industrial Unit-80, Block-G, Sector-63, Noida UP-201301, India ; Ph: +91-120-4166921, Email: info@acerbiomed.com; sales@acerbiomed.com; Web: www.acerbiomedicals.com ; www.acerbiomed.com